

Problem 1:

A long, circular aluminium rod attached at one end to the heated wall and transfers heat through convection to a cold fluid.


(a) If the diameter of the rod is tripled, by how much would the rate of heat removal change?

(b) If a copper rod of the same diameter is used in place of aluminium, by how much would the rate of heat removal change?

Known: long, aluminum cylinder acts as an extended surface.

Find: (a) increase in heat transfer if diameter is tripled and (b) increase in heat transfer if copper is used in place of aluminum.

Schematic:

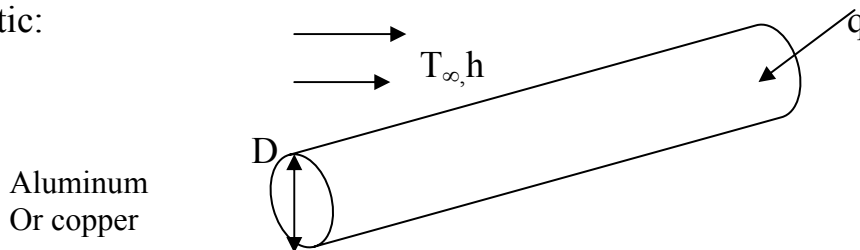

Assumptions: (1) steady-state conditions, (2) one-dimensional conduction, (3) constant properties, (4) uniform convection coefficient, (5) rod is infinitely long.

Properties: aluminum (pure): $k=240\text{W/m}\cdot\text{K}$;
copper (pure): $k=400\text{W/m}\cdot\text{K}$

Analysis: (a) for an infinitely long fin, the fin rate is

$$q_f = M = (hpkA_c)^{\frac{1}{2}} \theta_b$$

$$q_f = (h\pi Dk\pi D^2 / 4)^{\frac{1}{2}} \theta_b = \frac{\pi}{2} (hk)^{\frac{1}{2}} D^{\frac{3}{2}} \theta_b$$

Where $P=\pi D$ and $A_c=\pi D^2/4$ for the circular cross-section. Note that $q_f \approx D^{3/2}$. Hence, if the diameter is tripled,

$$\frac{q_{f(3D)}}{q_{f(D)}} = 3^{\frac{3}{2}} = 5.2$$

And there is a 520 % increase in heat transfer.

(b) in changing from aluminum to copper, since $q_f \approx k^{1/2}$, it follows that

$$\frac{q_f(Cu)}{q_f(Al)} = \left(\frac{k_{Cu}}{k_{Al}}\right)^{\frac{1}{2}} = \left(\frac{400}{240}\right)^{\frac{1}{2}} = 1.29$$

And there is a 29 % increase in the heat transfer rate.

Comments: (1) because fin effectiveness is enhanced by maximum $P/A_c = 4/D$. the use of a larger number of small diameter fins is preferred to a single large diameter fin.


(2) From the standpoint of cost and weight, aluminum is preferred over copper.

Problem 2:

Two long copper rods of diameter $D=1$ cm are soldered together end to end, with solder having melting point of 650°C . The rods are in the air at 25°C with a convection coefficient of $10\text{W}/\text{m}^2 \cdot \text{K}$. What is the minimum power input needed to effect the soldering?

Known: Melting point of solder used to join two long copper rods.

Find: Minimum power needed to solder the rods.

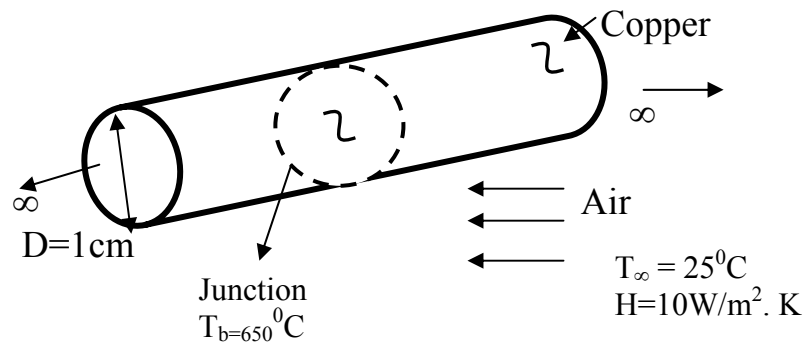Schematic:

Assumptions: (1) steady-state conditions, (2) one-dimensional conduction along the rods, (3) constant properties, (4) no internal heat generation, (5) negligible radiation exchange with surroundings, (6) uniform, h and (7) infinitely long rods.

Properties: copper $T = (650+25)^{\circ}\text{C} \approx 600\text{K}$: $k=379\text{ W}/\text{m}\cdot\text{K}$

Analysis: the junction must be maintained at 650°C while energy is transferred by conduction from the junction (along both rods). The minimum power is twice the fin heat rate for an infinitely long fin,

$$q_{\min} = 2q_f = 2(hpkA_c)^{\frac{1}{2}}(T_b - T_{\infty})$$

substituting numerical values,

$$q_{\min} = 2\left(10\frac{\text{W}}{\text{m}^2\cdot\text{K}}(\pi \times 0.01\text{m})\left(379\frac{\text{W}}{\text{m}\cdot\text{K}}\right)\frac{\pi}{4}(0.01\text{m})^2\right)^{\frac{1}{2}}(650 - 25)^0\text{C}.$$

therefore,

$$q_{\min} = 120.9\text{W}$$

Comments: radiation losses from the rod are significant, particularly near the junction, thereby requiring a larger power input to maintain the junction at 650^0C .


Problem 3:

Determine the percentage increase in heat transfer associated with attaching aluminium fins of rectangular profile to a plane wall. The fins are 50mm long, 0.5mm thick, and are equally spaced at a distance of 4mm (250fins/m). The convection coefficient affected associated with the bare wall is $40\text{W/m}^2 \cdot \text{K}$, while that resulting from attachment of the fins is $30\text{W/m}^2 \cdot \text{K}$.

Known: Dimensions and number of rectangular aluminum fins. Convection coefficient with and without fins.

Find: percentage increase in heat transfer resulting from use of fins.

Schematic:

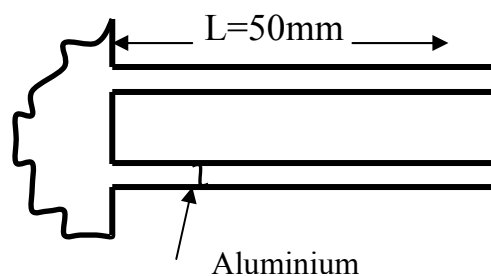

$$\begin{aligned} N &= 250\text{m}^{-1} \\ W &= \text{width} \\ h_w &= 30\text{W/m}^2 \cdot \text{K} (\text{with fins}) \\ h_{w_0} &= 40\text{W/m}^2 \cdot \text{K} (\text{without fins}) \end{aligned}$$

Assumptions: (1) steady-state conditions, (2) one-dimensional conduction, (3) constant properties, (4) negligible fin contact resistance, (6) uniform convection coefficient.

Properties: Aluminum, pure: $k \approx 240\text{W/m} \cdot \text{K}$

Analysis: evaluate the fin parameters

$$L_c = L + \frac{t}{2} = 0.0505\text{m}$$

$$A_p = L_c t = 0.0505\text{m} \times 0.5 \times 10^{-3}\text{m} = 25.25 \times 10^{-6}\text{m}^2$$

$$L_c^{3/2} (h_w / KA_p)^{1/2} (0.0505\text{m})^{3/2} \left(\frac{30\text{W/m}^2 \cdot \text{K}}{240\text{W/m} \cdot \text{K} \times 25.25 \times 10^{-6}\text{m}^2} \right)^{1/2}$$

$$L_c^{3/2} (h_w / KA_p)^{1/2} = 0.80$$

it follows that, $\eta_f = 0.72$. hence

$$q_f = \eta_f q_{\max} = 0.72 h_w 2wL\theta_b$$

$$q_f = 0.72 \times 30\text{W/m}^2 \cdot \text{K} \times 2 \times 0.05\text{m} \times (w\theta_b) = 2.16\text{W/m/K}(w\theta_b)$$

With the fins, the heat transfer from the walls is

$$q_w = Nq_f + (1 - Nt)wh_w\theta_b$$

$$q_w = 250 \times 2.16 \frac{W}{m.K} (w\theta_b) + (1m - 250 \times 5 \times 10^{-4} m) \times 30 W / m^2 .K (w\theta_b)$$

$$q_w = (540 + 26.63) \frac{W}{m.K} (w\theta_b) = 566w\theta_b$$

Without the fins, $q_{wo} = h_{wo} 1m \times w\theta_b = 40w\theta_b$.

Hence the percentage increases in heat transfer is

$$\frac{q_w}{q_{wo}} = \frac{566w\theta_b}{40w\theta_b} = 14.16 = 1416\%$$

Comments: If the finite fin approximation is made, it follows that $q_f = (hPkA_c)^{1/2} \theta_b = [h_w 2wkw t]^{1/2} \theta_b = (30 * 2 * 240 * 5 * 10^{-4})^{1/2} w\theta_b = 2.68w\theta_b$. Hence q_f is overestimated.